

Elevators

CONVENTIONAL CENTER LATCH ELEVATORS

Center latch elevator type "A"


"A" series elevators are conventional center latch collar type elevators for handling API drill pipe, casing, and tubing. They range in size from 1.050" through 8 5/8". "A" elevators are made from alloy steel, heat treated, magnetic particle inspected and fully API rated.



CENTER LATCH ELEVATOR 90 DEG. COLLAR TYPE				
PART #	TYPE	TON	SIZE O.D.	WEIGHT LBS.
32387	TA	35	1 050" - 2 7/8"	39
32385	TA	65	1 660" - 2 7/8"	65
32386	TA	65	3 1/2" - 4 1/2"	83
32383	TA	100	2 3/8" - 2 7/8"	100
32384	TA	100	3 1/2" - 4 1/2"	158
29960	TA	100	5 1/2" - 8 5/8"	350
32754	TA	150	4 1/2" - 8 5/8"	430
25462	RA	125	2 3/8" - 3 1/2"	158
25459	RA	150	3 1/2" - 5 1/2"	190
12526	MAA	175	3 1/2" - 5 1/2"	187
13373	RA	250	3 1/2" - 7"	360

18 Degree Center Latch Elevator "G" series

"G" type elevators are conventional center latch taper type elevators for handling external upset drill pipe and tubing. "G" series elevators are made from alloy steel, heat treated and magnetic particle inspected and fully API rated.



CENTER LATCH ELEVATOR 90 DEG. COLLAR TYPE				
PART #	TYPE	TON	SIZE O.D.	WEIGHT LBS.
30157	MG	100	2 3/8" - 5"	205
30156	RG	150	2 3/8" - 4 1/2"	290
13884	MGG	175	2 3/8" - 5"	360
35005	MGG	250	3 1/2" - 5 1/2"	578
31068	GG	350	3 1/2" - 5 1/2"	550




Elevators

SLIP TYPE CENTER LATCH ELEVATORS

"MYT" Slip type elevator


- A lightweight tubing elevator.
- Size Range: For tubing $\frac{3}{4}$ " through 2 $\frac{7}{8}$ "
- Requires only one slip to handle its full range
- Rated Capacity: 40 tons

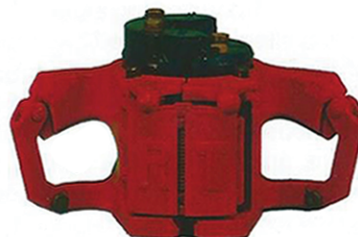

MYT SLIP INSERTS		
PART #	DESCRIPTION	# REQUIRED
24773	2 $\frac{7}{8}$ " - 2 $\frac{7}{8}$ " Insert	8
29255	2 $\frac{7}{8}$ " - 2 $\frac{3}{8}$ " Insert	8
29256	2 $\frac{7}{8}$ " - 2 $\frac{1}{16}$ " & 2" Insert	8
29257	2 $\frac{7}{8}$ " - 1 $\frac{1}{2}$ " (1.990) Insert	8
29258	2 $\frac{7}{8}$ " - 1 $\frac{1}{4}$ " (1.660) Insert	8
29259	2 $\frac{7}{8}$ " - 1" (1.315) Insert	8
29259-1	2 $\frac{7}{8}$ " - $\frac{3}{4}$ " (1.050) Insert	8

"YT" slip type elevator

- A medium weight tubing elevator
- Size Range: For tubing 1" through 3 $\frac{1}{2}$ "
- Requires the use of two sizes of slips to handle its full range
- Rated Capacity: 75 tons



YT SLIP INSERTS		
PART #	DESCRIPTION	# REQUIRED
24774	3 $\frac{1}{2}$ " - 3 $\frac{1}{2}$ " Insert	24
30358	3 $\frac{1}{2}$ " - 2 $\frac{7}{8}$ " Insert	24
24773	2 $\frac{7}{8}$ " - 2 $\frac{7}{8}$ " Insert	12
29255	2 $\frac{7}{8}$ " - 2 $\frac{3}{8}$ " Insert	12
29256	2 $\frac{7}{8}$ " - 2 $\frac{1}{16}$ " & 2" Insert	12
29257	2 $\frac{7}{8}$ " - 1 $\frac{1}{2}$ " (1.990) Insert	12
29258	2 $\frac{7}{8}$ " - 1 $\frac{1}{4}$ " (1.660) Insert	12
29259	2 $\frac{7}{8}$ " - 1" (1.315) Insert	12

